



HA20 RTJ

Performance & ease of use

- Best lifting speed of 48 sec.
- Industry leading working envelope with an outreach of 12.2 m
- Fully proportional and simultaneous movements
- Ease of transport

Excellent robustness

- Rugged hoods with ergonomic handle
- Long lasting structural design

Easy maintenance

- Exclusive modular basket with upper control box cover and tool tray
- Easy access to all components
- Self-diagnosis tool on lower control box





HA20 RTJ

ROUGH TERRAIN ARTICULATING BOOMS




TECHNICAL DATA

HA20 RTJ

| | |
|-----------------------------------|--------------------------|
| Working height | 20.6 m |
| Platform height | 18.6 m |
| Horizontal outreach | 12.2 m |
| Up and over clearance | 8.4 m |
| Lift capacity | 230 kg |
| F x G Platform size | 1.83 x 0.8 m |
| A Length - stowed | 8.8 m |
| B Width | 2.42 m |
| Height - stowed | 2.51 m |
| H Transport length | 6.5 m |
| C Transport height | 2.93 m |
| Vertical jib rotation | 140° (+60°/-80°) |
| Platform rotation | 180° (+90°/-90°) |
| Turntable rotation | 355° non continuous |
| Tailswing | 14.2 cm |
| D Wheelbase | 2.45 m |
| E Ground clearance | 38 cm |
| Tilt | 5° |
| Drive speed | 0.8 - 5 km/h |
| Gradeability | 45 % |
| Tires - solid rough terrain | 14x17,5" |
| Turning radius - outside | 4,5 m |
| Power source | Kubota 36.5 kW - 49.5 hp |
| Weight | 9 300 kg |

STANDARD EQUIPMENT

- 4 wheel drive, 2 wheel steer
- Permanent limited slip differential
- 230 kg / 500 lbs (2 persons) load capacity
- 4 simultaneous movements for maximum productivity
- Safe to use in winds up to 60 km/h - 37 mph
- Rotating beacon
- Modular standard basket 1.83 m x 0.80 m, Drop bar entry gate
- Upper control box protection cover and tool tray in ultra-solid plastic
- AC power to platform 110/230 V
- Self-diagnosis tool on lower control box
- Swing out engine tray for ease of maintenance
- Hour meter
- Low fuel level indicator (upper control box)
- Engine pre-heater with light indicator
- Sound and light alarm for tilt and load
- 12 V battery / electrical control system
- Electric pump system and emergency descent
- Travel alarm

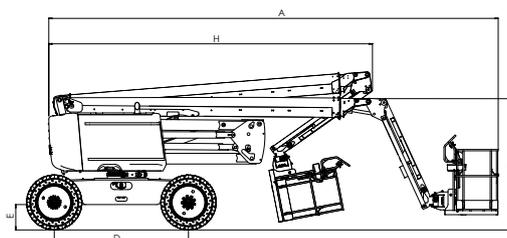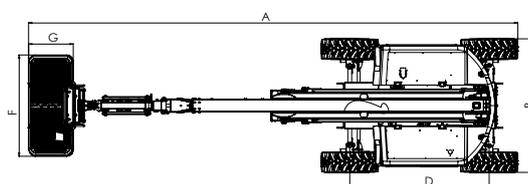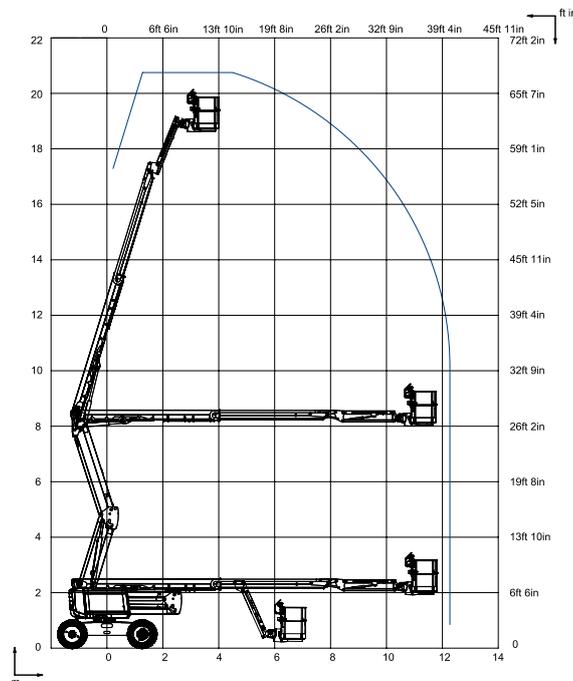

OPTIONS AND ACCESSORIES

- Large modular basket 2.44 m x 0.91 m
- Lateral swing door entry gate
- Hydraulic generator Dynaset 3.5Kw
- Air-line to platform 6.5 mm inner diameter
- 55 W working light
- Power to platform 110 / 230 V (With or without circuit-breaker 30mA)
- Flashing light
- Cold weather kit : -10°C /-25°C
- Hot weather kit : hydraulic oil cooler + hydraulic oil
- Biodegradable hydraulic oil
- Non-marking tires
- Glazier pack
- Spark arrestor and electric one-way valve
- Welder + Welder support
- Haulotte Activ'Shield™ Bar

2420004230 - We reserve the right to modify the technical characteristics of this document without notice - 10/2015

